




Because keeping you safe is our top priority... Please take a moment to read through the following care and use instructions for your new NoCry Roof Rack Pads.

1 Meet your new NoCry Roof Rack Pads

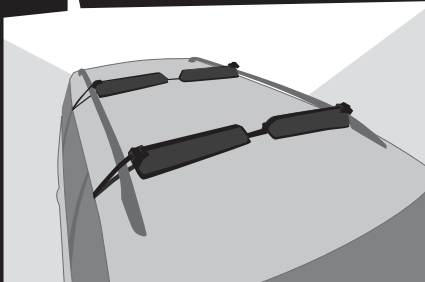


The kit includes a carry bag with 2 double roof rack pads and 1 small pouch with 2x 15 ft additional tie straps.

2 Prepare your car roof and inspect roof racks



Wash and dry the car roof before installing the pads, ensuring there is no dirt or sand that may scratch the roof. AVOID using the roof racks in rainy weather.

3 Place the racks flat across the car roof

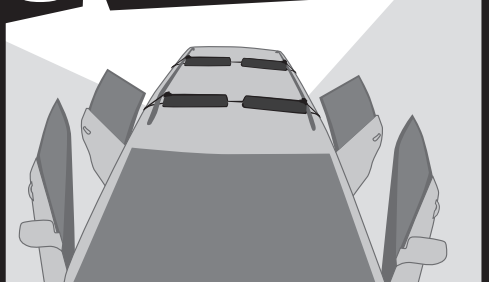

Open all doors on both sides of the vehicle and lay both roof rack pads flat on the roof. They should be parallel to one another, at least 2 ft apart.

4 Fasten through-the-doors straps

IMPORTANT! Always insert the strap from the bottom slot of the metal buckle to lock in place. When inserted from the top, it may start to slip.




Run the bottom straps from both sides **below the rails*** and through the open door. Loop the strap through the buckle and pull tight. Always use two 'half-hitches' knots for any excess strap for extra safety.

The roof racks should not be attached using any other ways. **DO NOT** attach them through windows. Make sure the parts or the load **DO NOT** impair the driver's vision or vehicle operation.

**run them above the rails IF the car has closed rails and the clips don't fit under*

5 Assemble your cargo

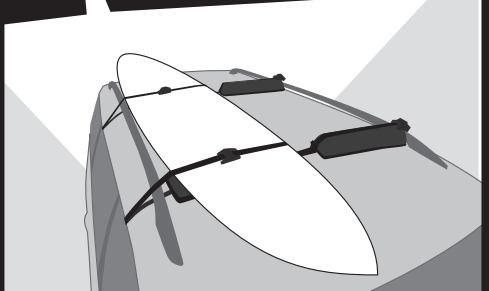


Place your cargo on the pads top side down. Position the buckle center of the board, secure the strap over the board and loop into the buckle from the bottom slot. Pull tight. Always secure and hide the excess straps inside the car.

6 How to clean and store your Roof Rack Pads



Clean roof racks with water and a clean soft cloth. Avoid using detergents. Store the roof pads in the carry bag provided.

7 How to use the extra straps

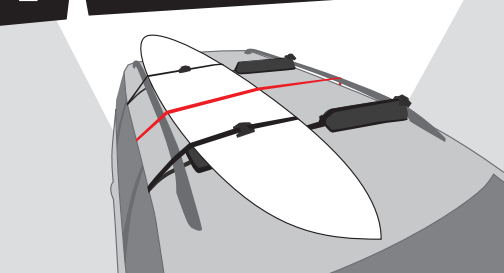

Use the extra straps to secure wider or larger cargo. Simply lay the strap over your load and secure them through the doors inside the car. Loop the strap through the buckle and pull tight.

8 Stuck? Need help? Get in touch.



wecare@nocry.com

Feel free to contact us. We're always here to help.

HOW DO YOU LIKE YOUR NEW NOCRY ROOF RACK PADS?

Help customers just like you make better choices by sharing an honest review of your experience on or

Your feedback helps us serve you better and it helps others choose the best products.

To leave us a review on **Amazon** > go to **Orders** > **Write a product review**
To leave us a review on **Trustpilot** > search **NoCry** > **Write a review**



BECAUSE KEEPING YOU SAFE IS OUR TOP PRIORITY...

We care a lot about your safety and satisfaction, that's why we've put together a few warnings and suggestions for you to follow before and while using your NoCry Roof Rack Pads.

- ✓ The roof rack pads are covered with durable PVC fabric and equipped with a built-in non-slip mat. The 2 x 15 ft adjustable straps are made of polypropylene webbing. They come with marine-grade stainless steel metal buckles that are molded in silicone cover, providing extra secure grip for your load. The built-in non-slip mat protects your car roof surface from getting scratches. It also sits snug against the roof, reducing wind noise.
- ✓ The circumference of the car roof must be less than 155,7 inches. The roof length — measuring from side to side — needs to be longer than 35 inches. The roof rack is not suitable for sliding door cars, soft top convertibles or cars fitted with curtain airbags. If your car has a sunroof, check the weight limit of the sunroof in the owner's manual before installing a roof rack.
- ✓ Do not overload your roof racks. The NoCry double wrap rack can hold up to 6 shortboards. It is suitable for carrying surfboards, SUPs, snowboards, skis, kayaks etc. DO NOT use these racks for boards longer than 8 ft.
- ✓ Always make sure that you're not placing a load onto the roof of your car that exceeds the maximum load capacity of the roof.
- ✓ Secure longer boards with an extra strap to avoid excessive wind force.
- ✓ The roof rack pads are not meant to be permanently applied to vehicles, as weathering may deteriorate the product. Protect them from sharp edges, rubbing, abrasion, heat and corrosive materials. Avoid using the roof racks in rainy weather — as they are installed through the doors, it may cause rain water to drip into the car through the straps.
- ✓ If you hear a humming noise while driving, pull over and twist the webbing strap 0.5 to 3 times then secure the buckle. This should minimize the noise.
- ✓ Always inspect the load before and during travel. Make sure it's secure and look for signs of wear and tear. DO NOT use the roof rack pads if any damages appear. Ensure the cargo is totally secure before driving. Loads settle and may shift during travel: check the load is secure after the first 6 miles and every 31 miles thereafter.

LIMITED LIFETIME WARRANTY — Each NoCry non-electric product is warranted to be free of defects in material and workmanship for as long as the consumer owns the product. Warranty does not cover normal wear and tear, environmental factors, accidental damage, or misuse. At NoCry's discretion, a defective product will be repaired or replaced. This warranty gives you specific legal rights but may be superseded by any other rights or warranties in effect, which may vary from state to state. More info at <https://nocry.com/warranty>.

If you have any questions or concerns, feel free to contact our customer support at wecare@nocry.com